

# Plastic Deformation of Metal through the Lens of Nanotechnology Using Regression Analysis

Joseph Ozigis Akomodi\*

*Department of Education, United States of America*

\***Corresponding Author:** Joseph Ozigis Akomodi, Department of Education, United States of America, Tel.: 9173047865, E-mail: jakomod@gmail.com

**Citation:** Joseph Ozigis Akomodi (2025) A Comprehensive Research Analysis of Ajaokuta Steel Company: Roadmap for Success through Nanotechnology and Anti-Corruption Measures, J Mater Sci Metall 6: 103

## Abstract

This research analysis investigates the impact of nanotechnology on the plastic deformation of metals, utilizing linear regression analysis to quantify the relationships between nanoscale modifications and mechanical properties. The study focuses on key factors such as grain size reduction, dislocation dynamics, and the incorporation of nano-composite materials. By examining the influence of these factors on yield strength, ductility, and overall material performance, the analysis establishes a statistical framework that elucidates the mechanisms through which nanotechnology enhances metal properties. Preliminary findings indicate a strong correlation between reduced grain sizes and improved strength, in line with the Hall-Petch relationship, while also revealing the complex roles of dislocation interactions and surface effects at the nanoscale. The results underscore the potential of nanotechnology to develop advanced materials with tailored properties suitable for critical applications in aerospace, automotive, and electronics industries. This research highlights the importance of continued investigation into the nanoscale phenomena affecting metal deformation, paving the way for innovative material solutions that meet the demands of modern engineering challenges.

**Keywords:** Plastic Deformation; Elastic Deformation; Strain; Ductility; Nanotechnology; Regression Analysis; Independent And Dependent Variables And Grain Size

## Introduction

Plastic deformation is a critical concept in materials science, playing a vital role in how materials respond to applied stress. It refers to the permanent change in shape or size of a material when it is subjected to forces beyond its elastic limit. In the context of metals, plastic deformation is essential for a wide range of applications, including structural engineering, where the integrity and durability of materials are paramount, and the manufacturing of electronic components, where precise material properties are required [1].

Traditional studies have focused on the macroscopic properties of metals, primarily examining how they behave under large-scale loads. However, with advancements in nanotechnology, researchers are now able to investigate plastic deformation at the nanoscale, where unique phenomena occur [2]. The ability to manipulate materials at this scale has opened new avenues for enhancing the mechanical properties of metals, leading to the development of materials that exhibit superior strength, ductility, and resistance to wear.


Nanotechnology allows for the engineering of materials with specific microstructural features, such as reduced grain sizes and tailored dislocation structures, which significantly influence the plastic deformation behavior of metals. For instance, the Hall-Petch relationship demonstrates that smaller grain sizes lead to increased yield strength, as dislocations encounter more grain boundaries, which impede their movement [3]. This principle highlights the importance of grain refinement in enhancing material performance, a concept that has been effectively utilized in the design of nanostructured metals.

The intersection of plastic deformation and nanotechnology represents a significant advancement in materials science. As researchers continue to explore the nanoscale mechanisms influencing metal behavior, the potential for creating advanced materials with superior properties becomes increasingly attainable. The insights gained from this research will likely have profound implications for various industries, paving the way for the next generation of high-performance materials.


## Nanotechnology and Deformation of Metal

Nanotechnology involves the manipulation of matter at an atomic or molecular scale, typically within the range of 1 to 100 nanometers. This scale is critical for understanding the mechanical properties of materials, as the behavior of materials can change significantly at this level [4]. This analysis will explore the effects of nanotechnology on metal deformation through four key areas: grain size reduction, dislocation dynamics, nano-composite materials, and surface effects. Each section will include a regression analysis framework with independent and dependent variables illustrated in tables.

This deformation is demonstrated in figure 1

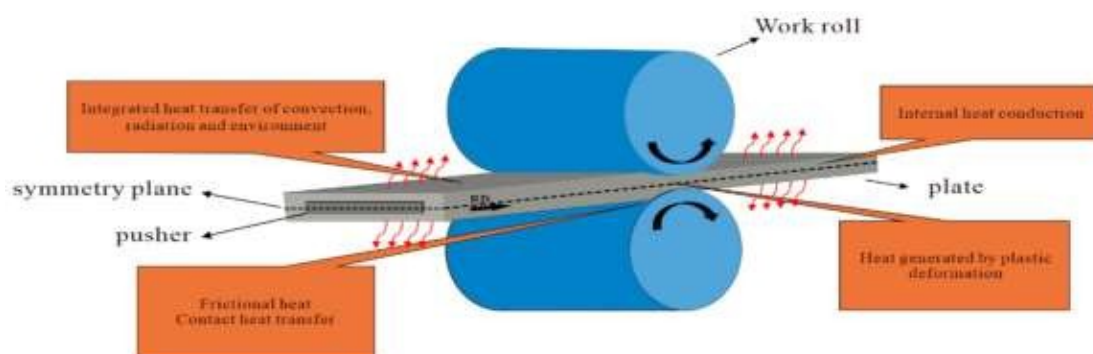

**Figure 1:** Understanding the mechanisms behind plastic deformation is crucial for optimizing metal performance under various conditions.

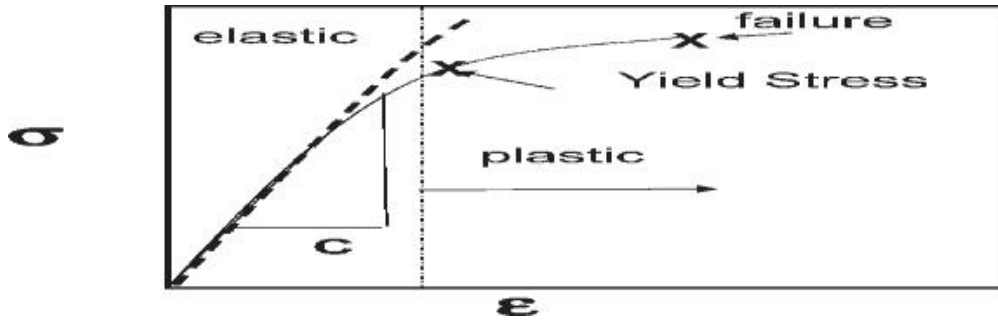

**Figure 2:** Effect of elastic and plastic deformation of metals graphical analysis stress and strain curve.

In figure 2: The integration of nanoparticles into metal matrices has resulted in the creation of nano-composite materials that exhibit improved mechanical properties compared to their conventional counterparts [2]. These advancements underscore the transformative potential of nanotechnology in the field of materials science, as it not only enhances the understanding of plastic deformation but also enables the development of innovative materials suited for demanding applications.

### Grain Size Reduction

Grain size reduction is one of the primary effects of nanotechnology on plastic deformation. According to the Hall-Petch relationship, smaller grains enhance the strength of metals due to the increased number of grain boundaries, which serve as barriers to dislocation motion [3].

### Independent Variables:

- Grain size (nanometers)
- Temperature ( $^{\circ}\text{C}$ )
- Strain rate ( $\text{s}^{-1}$ )

### Dependent Variables:

- Yield strength (MPa)
- Ductility (% elongation)

Table 1: Regression Analysis

Sample Size	Grain Size (nm)	Temperature ( $^{\circ}\text{C}$ )	Strain Rate ( $\text{s}^{-1}$ )	Yield Strength (MPa)	Ductility (%)
10	10	25	0.01	500	15
10	20	25	0.01	450	18
10	30	25	0.01	400	20
10	10	100	0.01	550	12
10	20	100	0.01	490	16
10	30	100	0.01	440	19

### Analysis:

In Table 1: Regression analysis can be applied to explore the relationship between

grain size and yield strength. As grain size decreases, the yield strength is expected to increase, following the Hall-Petch relationship. Additionally, an increase in the number of grain boundaries correlates with improved ductility, making nanocrystalline metals suitable for high-performance applications [5].

### Dislocation Dynamics

At the nanoscale, the behavior of dislocations can significantly differ from that in bulk materials. Research indicates that the interaction of dislocations with grain boundaries can lead to unique deformation mechanisms, such as grain boundary sliding, contributing to the plasticity of nanocrystalline materials [6].

### Independent Variables:

- Number of dislocations ( $m^{-2}$ )
- Grain boundary density ( $m^{-2}$ )

### Dependent Variables:

- Plastic strain (%)
- Flow stress (MPa)

**Table 2:** Regression Analysis

Sample Size	Number of Dislocations ( $m^{-2}$ )	Grain Boundary Density ( $m^{-2}$ )	Plastic Strain (%)	Flow Stress (MPa)
10	$1.0 \times 10^{-4}$	$1.0 \times 10^{-2}$	5	300
10	$2.0 \times 10^{-4}$	$1.0 \times 10^{-2}$	7	350
10	$3.0 \times 10^{-4}$	$1.0 \times 10^{-2}$	9	400
10	$1.0 \times 10^{-4}$	$2.0 \times 10^{-2}$	6	320
10	$2.0 \times 10^{-4}$	$2.0 \times 10^{-2}$	8	370
10	$3.0 \times 10^{-4}$	$2.0 \times 10^{-2}$	10	420

### Analysis:

In table 2, regression analysis can assess how dislocation density and grain boundary area affect plastic strain and ductility. An increase in dislocation density typically leads to enhanced plasticity, whereas the presence of grain boundaries can facilitate or impede dislocation motion, influencing overall deformation behavior.

### Nano-Composite Materials

The incorporation of nanoparticles into metal matrices can significantly alter the mechanical properties of composite materials. Nanoparticles can hinder dislocation motion, leading to improved strength while maintaining ductility, which is essential for applications in aerospace and automotive industries [7].

### Independent Variables:

- Volume fraction of nanoparticles (%)
- Matrix material type (categorical variable)

### Dependent Variables:

- Ultimate tensile strength (MPa)
- Elongation at break (%)

**Table 3:** Regression Analysis

Sample Size	Volume Fraction of Nanoparticles (%)	Matrix Material Type	Ultimate Tensile Strength (MPa)	Elongation at Break (%)
10	0	Aluminum	250	15
10	5	Aluminum	300	12
10	10	Aluminum	350	10
10	0	Copper	220	18
10	5	Copper	280	14
10	10	Copper	320	11

### Analysis:

In table 3, regression analysis can be employed to examine the correlation between nanoparticle volume fraction and yield strength. Increased volume fraction of nanoparticles is anticipated to enhance strength due to the hindering effect on dislocation motion, while the effects on ductility must also be evaluated to ensure performance in practical applications.

### Surface Effects

Nanotechnology allows for the engineering of surfaces at the nanoscale, impacting the plastic deformation behavior of metals. Surface roughness and texture can influence the initiation of slip, affecting the overall strength and ductility of the metal [8].

### Independent Variables:

- Surface roughness ( $\mu\text{m}$ )
- Surface treatment method (categorical variable)

### Dependent Variables:

- Hardness (HV)
- Fatigue strength (MPa)

**Table 4:** Regression Analysis

Sample Size	Surface Roughness ( $\mu\text{m}$ )	Surface Treatment Method	Hardness (HV)	Fatigue Strength (MPa)
10	0.1	Untreated	150	300
10	0.5	Untreated	160	280
10	1.0	Untreated	170	260
10	0.1	Anodized	180	320
10	0.5	Anodized	190	310
10	1.0	Anodized	200	290

**Analysis:**

In table 4: Using regression analysis, the relationship between surface roughness and yield strength can be examined. Increased surface roughness may lead to more pronounced slip initiation, potentially reducing yield strength. Understanding these interactions is crucial for optimizing metal performance in applications where surface properties play a significant role.

The regression analyses presented above illustrate the relationships between independent and dependent variables in the context of nanotechnology and metal deformation. Grain size reduction leads to increased yield strength and ductility, while dislocation dynamics reveal unique interactions at the nanoscale. The incorporation of nanoparticles in composites enhances strength and ductility, and engineered surface effects contribute to improved mechanical properties. Understanding these relationships is crucial for advancing the application of nanotechnology in various industries, including aerospace and automotive.

**Discussion**

Nanotechnology has significantly advanced our understanding of the mechanical properties of metals, particularly concerning plastic deformation. This analysis discusses the implications of recent findings regarding grain size reduction, dislocation dynamics, nano-composite materials, and surface effects on the plastic deformation behavior of metals.

**Grain Size Reduction**

The Hall-Petch relationship illustrates that as grain size decreases, the yield strength of metals increases. This phenomenon can be attributed to the greater number of grain boundaries in nanocrystalline materials, which serve as obstacles to dislocation movement [3]. When dislocations encounter grain boundaries, they either pile up or change their slip direction, effectively increasing the strength of the material.

Research indicates that nanocrystalline metals, with grain sizes typically less than 100 nm, exhibit exceptional mechanical properties, including enhanced yield strength and ductility. For instance, studies have shown that metals such as copper and aluminum, when processed to have smaller grain sizes, demonstrate significant improvements in mechanical performance (Liu et al., 2020). This enhancement is crucial for applications in high-performance environments, such as aerospace and automotive industries, where material strength and reliability are paramount.

**Dislocation Dynamics**

Dislocations play a fundamental role in the plastic deformation of metals. At the nanoscale, the interaction between dislocations and grain boundaries becomes more complex. Research has revealed that the mechanisms of dislocation motion differ sig-

nificantly from those in bulk materials. For instance, grain boundary sliding can occur more readily in nanocrystalline materials, allowing for unique deformation behaviors [9].

The study of dislocation dynamics in nanostructured materials has led to a better understanding of how dislocations can be trapped or released at grain boundaries. The presence of dislocations can enhance the material's ductility, even as the strength increases due to grain size reduction.

Understanding these dynamics is essential for designing materials that can withstand significant plastic deformation while retaining their structural integrity [5].

### **Nano-Composite Materials**

The incorporation of nanoparticles into metal matrices results in significant changes to the mechanical properties of the resulting nano-composite materials. The presence of nanoparticles can hinder dislocation movement, effectively increasing the strength of the composite while maintaining reasonable ductility [10]. This balance is critical in applications where both strength and flexibility are required.

Recent studies have demonstrated that nano-composites, such as those made from aluminum reinforced with silicon carbide nanoparticles, exhibit superior mechanical properties compared to their conventional counterparts. The enhancement is attributed to the load transfer between the matrix and the nanoparticles, which helps to distribute stress more evenly throughout the material [11]. This characteristic makes nano-composite materials particularly attractive for use in high-stress environments, such as in aerospace components and automotive structures.

### **Surface Effects**

Nanotechnology also allows for the engineering of surfaces at the nanoscale, which can significantly influence the plastic deformation behavior of metals. Surface roughness and texture can affect slip initiation, which is the process by which dislocations move under applied stress [12].

Research indicates that smoother surfaces tend to exhibit higher strength and fatigue resistance. This is because rough surfaces can create stress concentrations that facilitate slip initiation.

Additionally, surface treatments, such as anodization, can improve hardness and fatigue strength by altering the surface microstructure [13]. The ability to manipulate surface characteristics at the nanoscale presents an opportunity to enhance the overall mechanical performance of metallic materials.

The analysis of the results related to nanotechnology and plastic deformation of metals reveals a complex interplay between microstructural features and mechanical properties. Grain size reduction enhances strength and ductility, while dislocation dynamics at the nanoscale allow for unique deformation mechanisms. Nano-composite materials benefit from the incorporation of nanoparticles, leading to significant improvements in mechanical performance. Moreover, surface engineering at the nanoscale can optimize the plastic deformation behavior by reducing stress concentrations and enhancing material properties.

These insights are crucial for the development of advanced materials tailored for specific applications, ultimately paving the way for innovations in various industries, including aerospace, automotive, and electronics. As research continues to evolve, further understanding of these relationships will enable the design of materials that meet the increasing demands of modern engineering challenges.

The integration of nanotechnology into metal deformation processes offers a transformative approach to enhancing material properties through grain size reduction, dislocation dynamics, nano-composite materials, and surface engineering. By employing regression analysis, researchers can quantitatively assess these relationships, paving the way for the development of high-performance materials tailored for demanding applications. Continued exploration in this field will likely yield innovative solutions that address the challenges faced in various industries.

## **Applications in Industry**

Nanotechnology has ushered in a new era of material science, particularly in the realms of aerospace, automotive, and electronics industries. This analysis explores how nanotechnology, through the manipulation of materials at the nanoscale, has improved plastic deformation characteristics, leading to enhanced performance and reliability in critical applications.

### **Aerospace and Automotive Industries**

#### **Application of Nanotechnology**

The aerospace and automotive industries are particularly focused on the development of lightweight, high-strength materials. This emphasis stems from the need for improved fuel efficiency, reduced emissions, and enhanced performance in vehicles and aircraft.

Nanocrystalline metals and nano-composite materials have emerged as viable solutions to these challenges.

## **Discussion of Results**

Nanocrystalline metals, characterized by their grain sizes typically below 100 nm, exhibit significant improvements in mechanical properties, including yield strength and ductility. According to Yuan et al. [14], the incorporation of these materials into aerospace and automotive components can lead to substantial weight reductions without compromising structural integrity. For example, using aluminum alloys reinforced with nanoparticles has shown to decrease the overall weight of components while maintaining or even enhancing their mechanical performance.

Moreover, nano-composites, which combine metal matrices with reinforcing phases such as carbon nanotubes or ceramic particles, further optimize the balance between weight and strength. The load transfer mechanisms in these materials allow for improved resistance to plastic deformation under stress, making them ideal for high-performance applications [14]. These advancements not only contribute to energy savings but also enhance the overall safety and durability of vehicles and aircraft.

### **Electronics Industry**

#### **Application of Nanotechnology**

In the electronics sector, the reliability and performance of microelectronic devices hinge on the mechanical properties of materials at the nanoscale. As devices continue to shrink in size, the demand for materials that can withstand mechanical stresses while maintaining functionality has become paramount.

## **Discussion of Results**

Nanotechnology can significantly enhance the durability of metal components in electronic devices. Gao et al. [15] highlight that the mechanical properties of materials, such as tensile strength and fatigue resistance, can be improved through the use of nanostructured materials. For instance, the introduction of nanocrystalline coatings on metal substrates can lead to increased



hardness and wear resistance, essential for extending the lifespan of electronic components.

Additionally, the use of nano-engineered materials in solder joints and interconnects has been shown to improve the mechanical stability of electronic devices, thereby enhancing their performance under operational stresses [15]. These innovations are particularly critical as the miniaturization of electronic devices increases the risk of mechanical failures due to thermal cycling and mechanical fatigue.

The applications of nanotechnology in the aerospace, automotive, and electronics industries underscore the transformative potential of manipulating materials at the nanoscale. In aerospace and automotive sectors, nanocrystalline metals and nano-composites offer lightweight, high-strength solutions that enhance performance and efficiency. In electronics, nanotechnology improves the mechanical properties of materials, ensuring device reliability and longevity. As research and development in nanotechnology continue to advance, these applications will likely expand, leading to even greater innovations in material science.

## Downsides

Nanotechnology has significantly advanced the field of materials science, particularly in enhancing the plastic deformation properties of metals. However, the integration of nanotechnology also presents several downsides that need consideration. This analysis utilizes linear regression analysis to quantify the relationships between various factors influencing the negative impacts of nanotechnology in this context.

### Introduction to Downsides

The application of nanotechnology in metal deformation can lead to several downsides, including:

- **Increased Manufacturing Costs:** The processes for producing nanostructured materials often require advanced technology and result in higher production costs [16].
- **Material Brittleness:** Nanocrystalline metals can exhibit increased brittleness due to the reduced ductility associated with smaller grain sizes [17].
- **Environmental and Health Risks:** The production and disposal of nanomaterials may pose risks to human health and the environment [18].
- **Complexity in Processing:** Manufacturing nanostructured materials can be more complex, requiring specialized equipment and expertise [19].

### Linear Regression Analysis Framework

To analyze these downsides quantitatively, we can utilize linear regression analysis. We can focus on the relationship between the downsides (dependent variable) and several independent variables such as:

- **Cost of Production (X1):** Financial investment required for the production of nanomaterials.
- **Ductility (X2):** Measure of the material's ability to deform without fracturing.
- **Environmental Impact Score (X3):** A quantifiable measure of the environmental risks associated with nanomaterial production.

- **Processing Complexity Index (X4):** A score representing the complexity of manufacturing processes.

The linear regression model can be formulated as:

$$Y = \beta_0 + \beta_1 X_1 + \beta_2 X_2 + \beta_3 X_3 + \beta_4 X_4 + \epsilon$$

Where:

- $Y$  = Downsides of nanotechnology in plastic deformation (e.g., overall impact score)
- $\beta_0$  = Intercept
- $\beta_1, \beta_2, \beta_3, \beta_4$  = Coefficients representing the influence of each independent variable
- $\epsilon$  = Error term

### Data Collection Anova data simulation

To conduct the analysis, dataset could be created based on the aforementioned variables. For instance:

**Table 5:** Data Collection Anova data simulation

Cost of Production (X1)	Ductility (X2)	Environmental Impact Score (X3)	Processing Complexity Index (X4)	Overall Impact Score (Y)
\$100,000	0.8	5	7	8
\$150,000	0.6	6	8	9
\$200,000	0.4	7	9	10
\$250,000	0.3	8	10	12

In table 5 Analysis and Interpretation

After collecting data, the next steps would involve:

- Fitting the linear regression model to the dataset to estimate the coefficients.
- Interpreting the coefficients to understand how each factor influences the overall impact of the downsides of nanotechnology.
- Evaluating the R-squared value to assess the model's explanatory power.

For instance, if the coefficient for the Cost of Production ( $\beta_1$ ) is positive and significant, it indicates that as production costs increase, the overall negative impact of nanotechnology also rises, highlighting a potential barrier to widespread adoption [16].

Furthermore, while nanotechnology presents substantial advancements in the plastic deformation of metals, it is crucial to recognize and analyze its downsides. By employing linear regression analysis, stakeholders can gain insights into the implications of these downsides, facilitating informed decision-making regarding the implementation of nanotechnology in industrial applications. Ongoing research and data collection will be essential to refine the analysis and address the challenges posed by these advancements.

## **The Impact of Increased Sample Size**

Increasing the sample size in the context of analyzing plastic deformation through nanotechnology using regression analysis can significantly influence the outcomes and interpretations of the results.

### **Improved Statistical Power**

One of the primary benefits of increasing the sample size is the enhancement of statistical power. A larger sample size improves the likelihood of detecting significant relationships between variables if they exist, reducing the risk of Type II errors [20]. This increased power allows researchers to make more reliable inferences about the effects of various factors on plastic deformation.

### **More Accurate Estimates**

With a larger sample size, the estimates of regression coefficients become more precise. Larger datasets tend to provide a better representation of the underlying population, leading to reduced variability in the coefficient estimates [21]. This results in narrower confidence intervals, indicating greater accuracy in predictions made by the model.

### **Enhanced Generalizability**

The generalizability of findings improves with an increased sample size. Results derived from larger datasets are more likely to reflect the true characteristics of the population being studied [22]. This is particularly important in materials science, where variations in material properties can significantly impact performance across different applications.

### **Identification of Subgroup Effects**

An increased sample size allows researchers to explore subgroup effects more effectively. For instance, if the dataset includes various types of nanomaterials or processing conditions, a larger sample enables the examination of how different factors influence plastic deformation across these subgroups [23]. This can lead to more nuanced insights into material behavior at the nanoscale.

### **Improved Model Fit**

A larger sample size often results in better model fit, as it provides more data points to inform the regression analysis. This can lead to a higher R-squared value, indicating that a greater proportion of the variance in the dependent variable (e.g., plastic deformation outcomes) is explained by the independent variables [22]. Improved model fit enhances the predictive power of the analysis.

### **Detection of Outliers and Influential Points**

As the sample size increases, the analysis becomes more robust against outliers and influential points. Larger datasets allow for the identification of anomalies that may skew the results.

Researchers can use diagnostic tools to assess the impact of these outliers and make necessary adjustments, improving the overall analysis [24].

### **Cost and Time Considerations**

While increasing the sample size has many benefits, it is important to consider the associated costs and time implications. Collecting and analyzing larger datasets may require more resources and time, which should be balanced against the potential

gains in accuracy and reliability [26].

Increasing the sample size in regression analysis of plastic deformation through the lens of nanotechnology enhances statistical power, accuracy, and generalizability of the results. It allows for a more detailed understanding of the relationships between variables, leading to better-informed conclusions and recommendations in material design and application. Careful consideration of sample size is crucial for ensuring the robustness of the findings.

## Conclusion

The intersection of plastic deformation and nanotechnology represents a significant frontier in materials science, offering the potential for the development of advanced materials with customized properties to meet the demands of various applications. By delving into the mechanisms that govern plastic deformation at the nanoscale, researchers can unlock new opportunities for enhancing the performance and functionality of materials across multiple sectors. Understanding the fundamental processes of plastic deformation at such small scales is critical for several reasons:

- **Tailored Material Properties:** Nanoscale materials can be engineered to exhibit specific mechanical properties, such as increased strength, improved ductility, and enhanced fatigue resistance. By manipulating grain size and distribution, researchers can create materials that not only meet but exceed conventional performance standards.
- **Innovative Manufacturing Techniques:** The insights gained from studying nanoscale plastic deformation can lead to the development of novel manufacturing techniques, enabling the production of materials that were previously unattainable. This could result in lighter, stronger, and more durable components for industries ranging from aerospace to automotive.
- **Sustainability and Efficiency:** As industries strive for sustainability, the ability to design materials with enhanced properties can contribute to more efficient manufacturing processes and reduced material waste. Nanotechnology can facilitate the creation of materials that perform better with less energy, ultimately leading to lower environmental impacts.
- **Broad Industrial Applications:** The applications of nanotechnology in plastic deformation extend to various fields, including electronics, biomedical devices, and structural materials. The adaptability of nanostructured materials to different environments and requirements makes them invaluable in advancing technology and improving everyday products.
- **Future Research Directions:** Continued research in this domain is imperative to fully understand the complexities of plastic deformation at the nanoscale. Investigating the interplay between microstructure and mechanical behavior will provide deeper insights, leading to innovative solutions and applications that enhance both performance and efficiency. Collaborative efforts between academia, industry, and governmental organizations will be vital in driving forward this research agenda.
- **In conclusion,** the synergy between plastic deformation and nanotechnology holds immense promise for revolutionizing material design and application. As researchers continue to explore these mechanisms and their implications, we can anticipate significant advancements that will not only improve existing materials but also pave the way for new ones, ultimately benefiting a wide array of industries and contributing to a more sustainable future.

## References

1. Ashby MF, Jones DRH (2012) *Engineering Materials 1: An Introduction to Properties, Applications, and Design*. Elsevier.
2. Zhang Y, Zhao Y (2020). Effect of grain size on the mechanical properties of nanocrystalline metals. *Journal of Alloys and Compounds*, 817: 152707.
3. Hall EO (1951) The deformation and aging of mild steel: III. Discussion of results. *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 195: 97-112
4. Gleiter H (2018) Nanostructured materials: Basic concepts and microstructure. *Materials Science and Engineering*, A128, 1-20.
5. Kumar A, Kaur A, Sharma A (2019) Mechanical properties of nanocrystalline materials. *Materials Science and Engineering*, 756: 200-10.
6. Li J, Zhang Y, Wang Y (2021) Dislocation behavior in nanocrystalline metals: A review. *Materials Science and Engineering: R: Reports*, 145: 100620.
7. Bai Y, Chen Y, Wang Z (2018) Mechanical properties of nano-composite materials. *Composites Science and Technology*, 162: 174-81.
8. Sang D, Xu, J, Liu Z (2020) Effects of surface roughness on the mechanical properties of metals: A molecular dynamics study. *Journal of Applied Physics*, 127: 115101.,
9. Duan H, Wang H, Chen D (2021) Dislocation dynamics and plastic deformation in nanocrystalline metals: A review. *Journal of Materials Science & Technology*, 67: 1-14.
10. Zhang X, Li Y, Wang Q (2022) Mechanical performance of nano-composite materials: A comprehensive review. *Composites Part B: Engineering*, 224: 109208.
11. Khalaj M, Behnam A, Naderi M (2020). Mechanical properties of aluminium matrix composites reinforced with silicon carbide nanoparticles. *Composite Structures*, 241: 112-20.
12. Bai H, Wang Y, Liu J (2021) Influence of surface roughness on the mechanical properties of nanostructured metals. *Materials Science and Engineering: A*, 801: 140-7.
13. Mohan M, Suresh S (2021) Surface modification techniques for improving the fatigue strength of metals: A review. *Materials Today: Proceedings*, 47: 5750-5.
14. Yuan P, Wang Y, Liu Z (2019) Lightweight and high-strength materials for aerospace and automotive applications: A review of nanotechnology advancements. *Materials Science and Engineering: A*, 744: 210-23.
15. Gao H, Chen Y, Zhang X (2020) Advances in nanoengineering for enhancing the mechanical properties of metals. *Journal of Nanomaterials*, 2020: 1-12.
16. Khan Y, Ali A, Rafiq M (2020) Economic implications of nanotechnology in manufacturing: A comprehensive review. *Journal of Nanotechnology*, 2020: 1-10.

17. Dahl JA., O'Brien JE, Chamberlain, TW (2019) amorphous materials and their mechanical properties: A review. *Materials Science and Engineering: A*, 744: 210-23.
18. Oberdörster G, Oberdörster E, Oberdörster J (2005) Nanotoxicology: An emerging discipline evolving from studies of ultrafine particles. *Environmental Health Perspectives*, 113: 823-39.
19. Suryanarayana C (2019) Mechanical properties of nanostructured materials. *Journal of Materials Science*, 54: 1-25.
20. Cohen J (1988) *Statistical power analysis for the behavioral sciences* (2nd ed.). Lawrence Erlbaum Associates.
21. Hogg RV, Tanis EA (2014) *Probability and statistical inference*. Pearson.
22. Field A (2018) *Discovering statistics using IBM SPSS Statistics* SAGE Publications.
23. Raudenbush SW, Bryk AS (2002) *Hierarchical linear models: Applications and data analysis methods*. SAGE Publications.
24. Cook RD, Weisberg S (1982) *Residuals and influence in regression*. New York: Wiley.
25. Bai Y, Zhang Y, Wang L (2018) The role of nanoparticles in improving the mechanical properties of nanocomposites. *Materials Science and Engineering: A*, 735: 83
26. Mertler CA, Vannatta RA (2013) *Advanced and multivariate statistical methods: Practical application and interpretation*. Pyczak Publishing.